








## EMZOO Parking Assist system Installation Instructions

## 1 Preparation of tools



## 2 Pre-action inspection

Whether the appearance of the vehicle is normal

Whether the interior of the vehicle is normal

Whether the original engine function is normal

Whether the steering wheel control is normal

Check whether the air conditioner control is normal

Astern view switch, display is normal

Astern view switch, whether the display is normal thank you for buying this product!  
Before installation, read the installation guide and operation manual carefully to understand the overall operation process.

### Considerations for installation and use



#### Attention

For safety reasons, please strictly follow the relevant instructions. Otherwise, it may cause adverse consequences.



#### Hint

To protect your car, please follow the relevant instructions. Otherwise, its appearance or performance may be affected.

Disconnect the negative electrode of battery before disassembling.

Before installation, please take off the sharp objects you carry to avoid scratching the interior of the car.

Before installation, please pay attention to the bracket and other base parts of A/C body to avoid component damage.

Please be careful not to pull the plug when installing, so as not to break the parts.

## 3 Components


Note: Please confirm whether the components are correct before starting the operation



Camera



Extended line



Hole saw



Certification




Installation Instructions



Positioning Sticker

## 4 Interface definition

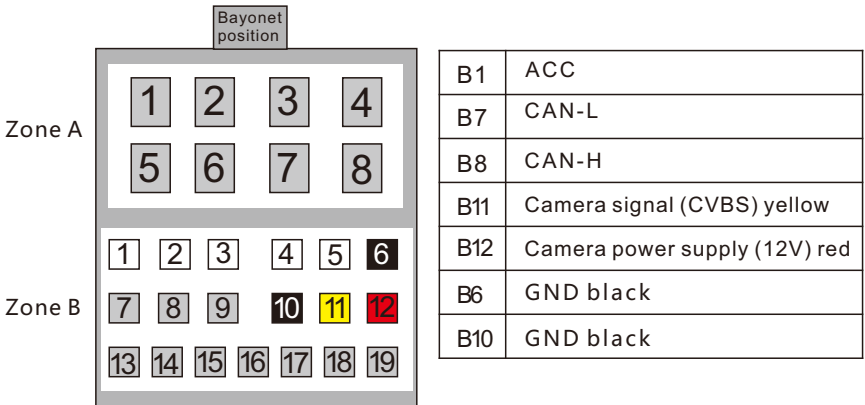

## 5 Remove the original panel

1. Use a rocker to open and remove the center console guard for the passenger side




2. Use a screwdriver to unscrew the screws (as shown in the figure below)



3. Use a rocker to tilt the lower decorative panel behind the screen, and use a screwdriver to unscrew three screws



7. Use a rocker to remove the rear tailgate decorative panel

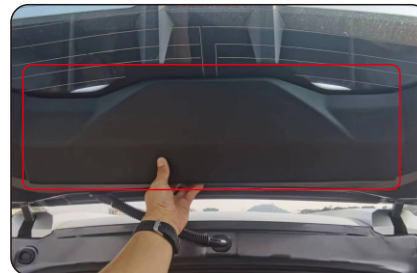

8. Lift out the bayonet and remove the two side panels



9. Open the rear door latch cover and remove the screws




4. Use a screwdriver to unscrew the three screws above the passenger glove box



5. Use a screwdriver to unscrew the two screws below the passenger glove box and remove the glove box



6. Use a screwdriver to unscrew three screws and remove the main unit

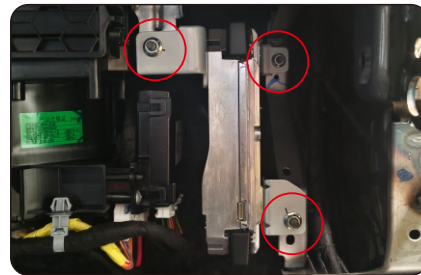

10. Remove the decorative panel



11. Use the provided hole opener at the latch of the positioning tailgate for hole opening






# 6 Installation


1.Remove the power plug of the original main unit




2.Interface definition diagram

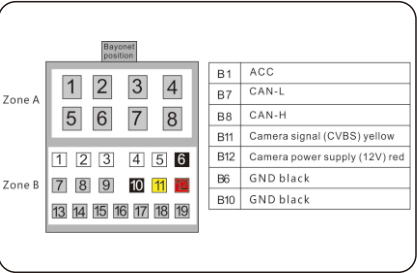

3.Insert the rear view extension cable socket into the main unit power supply (as shown in the figure below)

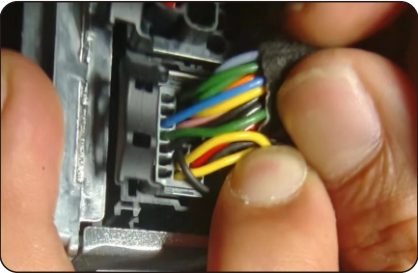

7.Wire harness docking

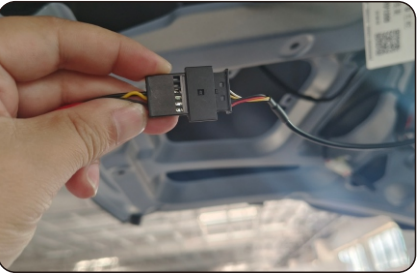

8.Start the vehicle to test the reflection, and restore the vehicle after the function is normal



9.Note: Fix the wiring harness with adhesive tape



4.The wiring diagram of the rear view extension cable shows the wiring to the rear tailgate




5.Install the wiring at the tailgate latch



6.Install the rear camera



10.Note: Install the sealing ring

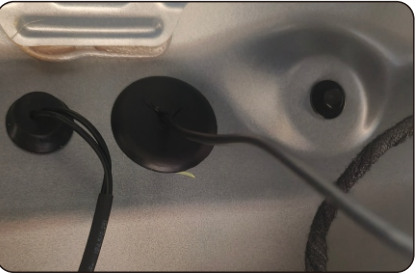

11.Restore the rear tailgate



12. Restore the center controller



## 7 End of installation



▲  
Installation effect of rear view camera

▲  
Reverse view effect